



Hitouch **6N PRO**

HN21N-66HT

725-750W

BIFACIAL

High Efficiency Module

24.1%

Maximum Efficiency



Higher Power Output

The GEN2 cell technology enables higher efficiency in Hanersun modules. Better light trapping and current collection to improve module power output and reliability.



Excellent Temperature Coefficient

Lower operating temperature and temperature coefficient increases the power output.



Long-Term Reliability

Module certified to withstand 5400 Pa positive static load and 2400 Pa negative static load.

Excellent anti-PID performance to guarantee a better sustainability in harsh environment.




Lower Hot Spot and Crack Risk

Reduce hot-spot risk with optimized electrical design and lower operating current.

Reduce crack risk by optimization of solar cell design.

Power Warranty

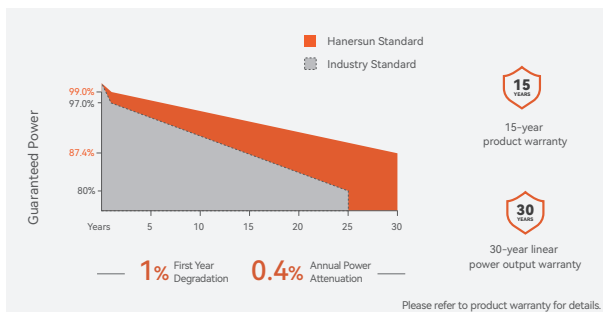

Certificates



Warranty partner



About Hanersun

Hanersun is a world-leading clean energy company, focusing on R&D, manufacturing and distribution of solar module and energy storage system, as well as comprehensive clean energy solutions. Committed to high-efficiency technologies, the company is one of the first to launch PV modules of 600W+ and 700W+ in the industry.

Electrical Characteristics (STC)

| Module Type | HN21N-66HT725W | HN21N-66HT730W | HN21N-66HT735W | HN21N-66HT740W | HN21N-66HT745W | HN21N-66HT750W |
|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Maximum Power (Pmax) | 725 | 730 | 735 | 740 | 745 | 750 |
| Maximum Power Voltage (Vmp) | 41.40 | 41.60 | 41.76 | 41.92 | 42.08 | 42.24 |
| Maximum Power Current (Imp) | 17.52 | 17.55 | 17.61 | 17.66 | 17.71 | 17.76 |
| Open-circuit Voltage (Voc) | 49.20 | 49.40 | 49.60 | 49.80 | 50.00 | 50.20 |
| Short-circuit Current (Isc) | 18.54 | 18.58 | 18.62 | 18.66 | 18.70 | 18.74 |
| Module Efficiency(%) | 23.3% | 23.5% | 23.7% | 23.8% | 24.0% | 24.1% |

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.

Power Tolerance: 0~+3%

Electrical Characteristics (BNPI)

| Module Type | 725W | 730W | 735W | 740W | 745W | 750W |
|-----------------------------|-------|-------|-------|-------|-------|-------|
| Maximum Power (Pmax) | 804 | 809 | 815 | 820 | 826 | 831 |
| Maximum Power Voltage (Vmp) | 41.40 | 41.60 | 41.76 | 41.92 | 42.08 | 42.24 |
| Maximum Power Current (Imp) | 19.43 | 19.45 | 19.52 | 19.57 | 19.63 | 19.68 |
| Open-circuit Voltage (Voc) | 49.20 | 49.40 | 49.60 | 49.80 | 50.00 | 50.20 |
| Short-circuit Current (Isc) | 20.55 | 20.59 | 20.63 | 20.68 | 20.72 | 20.76 |

BNPI: Irradiance: Front 1000W/m², Rear 135W/m², Cell Temperature 25°C, Air Mass AM1.5.

Mechanical Parameters

| | | | |
|-------------------|---|--------------|--|
| Solar Cells | N-TYPE Monocrystalline(210mm) | No. of Cells | 132 [2 x (11 x 6)] |
| Module Dimensions | 2384*1303*33mm | Weight | 37.4kg |
| Frame | Anodized Aluminium Alloy | J-Box | IP68 |
| Front Glass | 2.0 mm, AR Coating Heat Strengthened Glass | Connector | Z4S-abcd/MC4-EVO 2A/Others |
| Back Glass | 2.0 mm, Heat Strengthened Glass | Cables | 4.0mm ² , 300/300mm (can be customized) |

Operating Parameters

| | |
|----------------------------|----------------|
| Operational Temperature | -40°C~+70°C |
| Maximum System Voltage | 1500V DC (IEC) |
| Maximum Series Fuse Rating | 35A |
| Bifaciality | 80±5% |
| Fire Class Rating | Class C |

Temperature Ratings


| | |
|---------------------------------|------------|
| Temperature Coefficient of Pmax | -0.28%/°C |
| Temperature Coefficient of Voc | -0.23%/°C |
| Temperature Coefficient of Isc | +0.045%/°C |

Packaging


Pcs per Pallet: 33

Pcs per 40' HC: 594


I-V Curves of PV Module (740W)

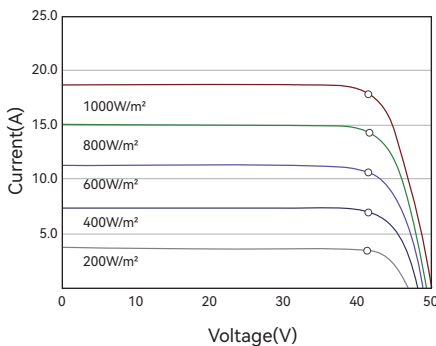


P-V Curves of PV Module (740W)

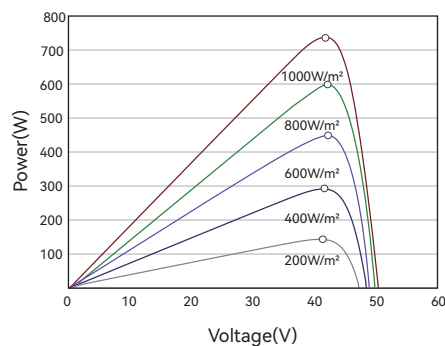

Dimensions (Unit: mm)

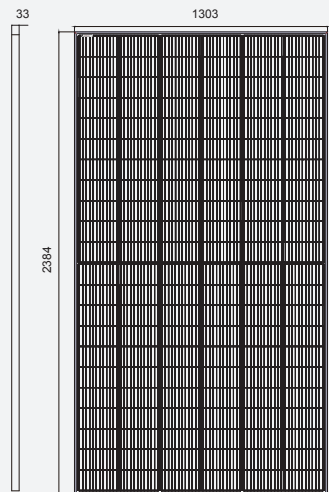

Front View

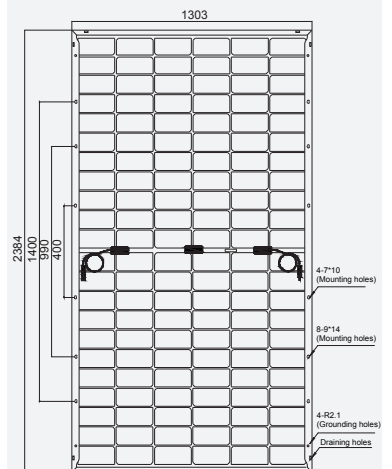

Back View

